


**I N F S Y S  
R E S E A R C H  
R E P O R T**

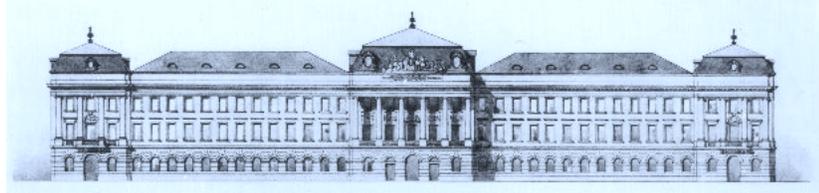

**INSTITUT FÜR INFORMATIONSSYSTEME  
ARBEITSBEREICH WISSENSBASIERTE SYSTEME**

**REASONING WITH FOREST LOGIC  
PROGRAMS USING FULLY ENRICHED  
AUTOMATA**

**CRISTINA FEIER THOMAS EITER**

**INFSYS RESEARCH REPORT 1843-15-02**

**JUNE 2015**

Institut für Informationssysteme  
AB Wissensbasierte Systeme  
Technische Universität Wien  
Favoritenstraße 9-11  
A-1040 Wien, Austria  
Tel: +43-1-58801-18405  
Fax: +43-1-58801-18493  
sek@kr.tuwien.ac.at  
www.kr.tuwien.ac.at



**kbs**  
*Knowledge-Based  
Systems Group*



REASONING WITH FOREST LOGIC PROGRAMS  
USING FULLY ENRICHED AUTOMATA

Cristina Feier<sup>1</sup>      Thomas Eiter<sup>2</sup>

**Abstract.** Forest Logic Programs (FoLP) are a decidable fragment of Open Answer Set Programming (OASP) which have the forest model property. OASP extends Answer Set Programming (ASP) with open domains—a feature which makes it possible for FoLPs to simulate reasoning with the expressive description logic *SHOQ*. At the same time, the fragment retains the attractive rule syntax and the non-monotonicity specific to ASP. In the past, several tableau algorithms have been devised to reason with FoLPs, the most recent of which established a NEXPTIME upper bound for reasoning with the fragment. While known to be EXPTIME-hard, the exact complexity characterization of reasoning with the fragment was still unknown. In this paper we settle this open question by a reduction of reasoning with FoLPs to emptiness checking of fully enriched automata, a form of automata which run on forests, and which are known to be EXPTIME-complete.

---

<sup>1</sup>Department of Computer Science, University of Oxford, Wolfson Building, Parks Road, OX1 3QD, Oxford, United Kingdom; email: feier@cs.ox.ac.uk

<sup>2</sup>Institut für Informationssysteme, Technische Universität Wien, Favoritenstraße 9-11, A-1040 Vienna, Austria; email: eiter@kr.tuwien.ac.at.

**Acknowledgements:** This work is partially supported by the EPSRC grants Score! and DBOnto and the Austrian Science Fund (FWF) grant P24090.

A short version of this paper has been accepted for publication at LPNMR'15.

Copyright © 2015 by the authors

## 1 Introduction

Open Answer Set Programming (OASP) [Heymans et al., 2008] extends (function-free) Answer Set Programming (ASP) [Gelfond and Lifschitz, 1988] with an open domain semantics: programs are interpreted with respect to arbitrary domains that might contain individuals which do not occur explicitly in the program. This makes it possible to state generic knowledge using OASP. At the same time, OASP inherits from ASP the negation under the stable model semantics. Thus, OASP bridges two important knowledge representation paradigms: the classical First Order Logic (FOL) open world and the non-monotonic rules closed world. It is part of a broad line of research which includes other approaches like DL-safe rules [Motik et al., 2005],  $\mathcal{DL}+log$  [Rosati, 2006], dl-programs [Eiter et al., 2008], Description Logic Rules [Krötzsch et al., 2008], Datalog<sup>±</sup> [Calì et al., 2009], MKNF<sup>+</sup> knowledge bases [Motik and Rosati, 2010], and Nonmonotonic Existential Rules [Magka et al., 2013].

In general, OASP is undecidable. To achieve decidability, several fragments have been defined by imposing syntactical restrictions on the shape of rules. Such a fragment are Forest Logic Programs (FoLP) which enjoy the forest model property: a unary predicate is satisfiable iff it is satisfied by a model that can be represented as a labeled forest, where nodes and arcs are labeled with sets of unary predicates and binary predicates, resp.

FoLPs are quite an expressive fragment as they allow, for instance, the simulation of standard reasoning tasks (like concept satisfiability and KB consistency) with  $\mathcal{SHOQ}$  ontologies [Feier and Heymans, 2013]. This property of FoLPs led to the *f-hybrid KBs*, a combination of rules and ontologies which distinguish themselves among other approaches like dl-safe rules, r-hybrid knowledge bases [Rosati, 2008], or MKNF<sup>+</sup> knowledge bases, by the fact that they impose no restrictions on the interaction between the signatures of the two components. Such restrictions prevent the need for reasoning with unknown individuals in the rule component. As f-hybrid KBs are based on the simulation of  $\mathcal{SHOQ}$  KBs within FoLPs, no such restriction is needed. Conceptual modeling using FoLPs is not restricted to simulating reasoning with  $\mathcal{SHOQ}$  KBs: it is also possible to translate *object-role modeling (ORM)* models as sets of FoLP rules, e.g. [Heymans, 2006].

As they can simulate reasoning within the Description Logic (DL)  $\mathcal{SHOQ}$ , it follows that reasoning with FoLPs is EXPTIME-hard. However, the exact complexity characterization of FoLPs was still open. Previously, reasoning with FoLPs was addressed by means of tableau-based algorithms: [Feier and Heymans, 2013] described a 2NEXPTIME tableau algorithm, while an improved algorithm which runs in the worst case in NEXPTIME has been described in [Feier, 2012]. While in the latter work it has been speculated that the non-deterministic tableau algorithm can be determinized in order to lead to an EXPTIME procedure which would be worst-case optimal, the determinization in the case of FoLPs proved elusive. Such a deterministic worst-case optimal algorithm has been devised for CoLPs, which restrict FoLPs to programs without constants, and simple FoLPs, a fragment in which recursion is restricted: the technique does not scale up to FoLPs (see [Feier, 2014]).

In this paper, we settle the open question regarding the exact complexity characterization of FoLPs: by using a reduction to emptiness checking of Fully Enriched Automata (FEAs), we show that satisfiability checking of unary predicates with respect to FoLPs is EXPTIME-complete. Hence, reasoning with FoLP rules and  $\mathcal{SHOQ}$  ontologies is not harder than reasoning with  $\mathcal{SHOQ}$  ontologies themselves.

Fully enriched automata have been introduced in [Bonatti et al., 2008] as a tool to reason with hybrid graded  $\mu$ -calculus, which extends  $\mu$ -calculus with graded modalities and nominals. They offer an elegant device for our encoding as they accept forests as inputs and also feature a parity acceptance condition that is useful in distinguishing well-supported models [Fages, 1991], a fundamental characteristic of (open) answer sets. However, FoLPs exhibit a specific form of the forest model property, in which every node can point

back to any root of the forest, and as such the encoding is not without its challenges.

The automata-based method has been previously applied to reason with CoLPs [Heymans et al., 2006]: satisfiability checking of unary predicates with respect to a CoLP has been reduced to non-emptiness checking of two-way alternating tree automata (2ATA) [Vardi, 1998]. 2ATAs have also been used to check consistency of normal bidirectional ASP programs (bd-programs) [Eiter and Šimkus, 2009], which are a decidable fragment of ASP extended with function symbols that also exhibit the tree model property. In the context of DL, 2ATAs have been employed to check concept satisfiability [Calvanese et al., 2002] and satisfiability of  $ALCQIb_{reg}$  KBs [Calvanese et al., 2007]—in the latter case, canonical models are forest-shaped, and as such they were encoded as trees in order to be processed using 2ATAs. In the case of FoLPs, it is not clear how such an encoding would work due to their special form of the forest model property. Finally, FEAs were used to encode satisfiability checking of  $ZOIQ$  concepts [Calvanese et al., 2009].

## 2 Preliminaries

We start by introducing the open answer set syntax and semantics [Heymans et al., 2008]. We assume countably infinite disjoint sets of constants, variables, and predicate symbols. Terms and atoms are defined as usual. We refer to an atom where the predicate symbol is unary or binary, as a unary or binary atom, resp. A *literal* is an atom  $a$  or a negated atom  $not\ a$ . We allow for *inequality literals* of the form  $s \neq t$ , where  $s$  and  $t$  are terms. A literal that is not an inequality literal will be called a *regular literal*.

For a set  $S$  of literals or (possibly negated) predicates,  $S^+ = \{a \mid a \in S\}$  and  $S^- = \{a \mid not\ a \in S\}$ . If  $S$  is a set of (possibly negated) predicates of arity  $n$  and  $t_1, \dots, t_n$  are terms, then  $S(t_1, \dots, t_n) = \{l(t_1, \dots, t_n) \mid l \in S\}$ . For a set  $S$  of atoms,  $not\ S = \{not\ a \mid a \in S\}$ .

A *program* is a countable set of rules  $r : \alpha \leftarrow \beta$ , where  $\alpha$  is a finite set of regular literals and  $\beta$  is a finite set of literals. We denote as  $head(r)$  the set  $\alpha$ , where  $\alpha$  stands for a disjunction, and as  $body(r)$  the set  $\beta$ , where  $\beta$  stands for a conjunction.

Atoms, literals, rules, and programs that do not contain variables are *ground*. For a rule, program, set of literals, or set of atoms  $R$ , let  $vars(R)$ ,  $preds(R)$ , and  $cts(R)$  be the sets of variables, predicates, and constants that occur in  $R$ , resp. A *universe*  $U$  for  $P$  is a non-empty countable superset of the constants in  $P$ :  $U \supseteq cts(P)$ . We call  $P_U$  the ground program obtained from  $P$  by substituting every variable in  $P$  by every element in  $U$ . Let  $\mathcal{B}_P$  be the set of regular atoms that can be formed from a ground program  $P$ .

An *interpretation*  $I$  of a ground program  $P$  is a subset of  $\mathcal{B}_P$ . We write  $I \models p(t_1, \dots, t_n)$  if  $p(t_1, \dots, t_n) \in I$  and  $I \models not\ p(t_1, \dots, t_n)$  if  $I \not\models p(t_1, \dots, t_n)$ . Also, for ground terms  $s, t$ , we write  $I \models s \neq t$  if  $s \neq t$ . For a set of ground literals  $L$ ,  $I \models L$  if  $I \models l$  for every  $l \in L$ . A ground rule  $r : \alpha \leftarrow \beta$  is *satisfied* with respect to  $I$ , denoted  $I \models r$ , if  $I \models l$  for some  $l \in \alpha$  whenever  $I \models \beta$ . A ground constraint  $\leftarrow \beta$  is satisfied with respect to  $I$  if  $I \not\models \beta$ .

For a positive ground program  $P$ , i.e., a program without *not*, an interpretation  $I$  of  $P$  is a *model* of  $P$  if  $I$  satisfies every rule in  $P$ ; it is an *answer set* of  $P$  if it is a  $\subseteq$ -minimal model of  $P$ . When  $P$  is definite (does not contain disjunction) the minimal model of  $P$  can be computed using the well-known  $T_P$  operator: for a set of atoms  $B$ , let  $T_P(B) = B \cup \{a \mid a \leftarrow \beta \in P \wedge B \models \beta\}$ . Then, let  $T_P^0(B) = B$  and  $T_P^{i+1}(B) = T_P(T_P^i(B))$ ; the minimal model (answer set) of  $P$ ,  $\mathcal{M}(P)$ , is defined as  $\bigcup_{i=0}^{\infty} T_P^i(\emptyset)$ . The derivation level of an atom  $a$  in  $\mathcal{M}(P)$ ,  $level(a, \mathcal{M}(P))$ , is the least integer  $k$  such that  $a \in T_P^k(\emptyset)$ . For ground programs  $P$  containing *not*, the *GL-reduct* [Gelfond and Lifschitz, 1988] with respect to  $I$  is defined as  $P^I$ , where  $P^I$  contains  $\alpha^+ \leftarrow \beta^+$  for  $\alpha \leftarrow \beta$  in  $P$ ,  $I \models not\ \beta^-$  and  $I \models \alpha^-$ .  $I$  is an *answer set* of a ground program  $P$  if  $I$  is an answer set of  $P^I$ .

An *open interpretation* of a program  $P$  is a pair  $(U, M)$  where  $U$  is a universe for  $P$  and  $M$  is an interpretation of  $P_U$ . An *open answer set* of  $P$  is an open interpretation  $(U, M)$  of  $P$ , with  $M$  an answer set of  $P_U$ . For every atom  $a \in M$ , where  $(U, M)$  is an open answer set of  $P$ ,  $level(a, \mathcal{M}(P_U^M) = M)$  is finite [Heymans, 2006].

We introduce notation for trees and forests which extend those in [Vardi, 1998]. Let  $\cdot$  be a concatenation operator on constants and natural numbers,  $\mathbb{N}^+$  be the set of positive integers, and  $\langle \mathbb{N}^+ \rangle$  be the set of all sequences of positive integers formed using the concatenation operator. We denote with  $\varepsilon$  the empty sequence: for a sequence of constants and/or natural numbers  $s$ ,  $s \cdot \varepsilon = s$ , where  $\cdot$  is concatenation; also, by convention,  $s \cdot c \cdot -1 = s$ , where  $c$  is a natural number, and  $\varepsilon \cdot -1$  is undefined. A *tree*  $T$  with root  $c$ , also denoted as  $T_c$ , is a set of nodes, where each node is a sequence of the form  $c \cdot s$ , where  $s \in \langle \mathbb{N}^+ \rangle$ , and for every  $x \cdot d \in T_c$ ,  $d \in \mathbb{N}^+$ , it must be the case that  $x \in T_c$ . When the root of the tree is irrelevant, we will simply refer to the tree as  $T$ . Given a tree  $T$ , its set of arcs is  $A_T = \{(x, y) \mid x, y \in T, \exists n \in \mathbb{N}^+. y = x \cdot n\}$ . We denote with  $succ_T(x) = \{y \in T \mid y = x \cdot i, i \in \mathbb{N}^+\}$  the successors of a node  $x$  in  $T$ . For a node  $y = x \cdot i \in T$ ,  $prec_T(y) = x$ .

A *forest*  $F$  is a set of trees  $\{T_c \mid c \in C\}$ , where  $C$  is a finite set of arbitrary constants. The set of nodes,  $N_F$ , and the set of arcs,  $A_F$ , of a forest  $F$  are defined as:  $N_F = \cup_{T \in F} T$ , and  $A_F = \cup_{T \in F} A_T$ , resp. For a node  $x \in N_F$ , let  $succ_F(x) = succ_T(x)$ , where  $x \in T$  and  $T \in F$ . For a node  $y = x \cdot i \in T$  and  $T \in F$ ,  $prec_F(y) = prec_T(y) = x$ . An *interconnected forest*  $EF$  is a tuple  $(F, ES)$ , where  $F = \{T_c \mid c \in C\}$  is a forest and  $ES \subseteq N_F \times C$ . The sets of nodes  $N_{EF}$  and arcs  $A_{EF}$  of an interconnected forest  $EF$  are defined as:  $N_{EF} = N_F$ , and  $A_{EF} = A_F \cup ES$ , resp. A  $\Sigma$ -labelled forest is a tuple  $(F, f)$  where  $F$  is an interconnected forest/tree and  $f : N_F \rightarrow \Sigma$  is a labelling function, with  $\Sigma$  being a set of arbitrary symbols.

### 3 Forest Logic Programs

*Forest Logic Programs (FoLPs)* are a fragment of OASP which have the forest model property. They allow only for unary and binary predicates and tree-shaped rules. The tree-like structure of rules refers to the chaining pattern of rule variables: one variable can be seen as the root of a tree and the others as descendants such that for every arc in the tree, there is a positive binary literal in the body which connects the two corresponding variables. Inequalities between ‘successor’ variables can also appear in the body of such a rule; we will refer to the set of literals in the body of a rule formed only with the ‘root’ variable as the ‘local part’ and to the remaining part as the ‘successor part’. FoLPs allow also for rules of the form:  $p(\tilde{t}) \vee not\ p(\tilde{t}) \leftarrow$ , where  $p$  is a unary/binary predicate.

**Definition 3.1.** A forest logic program (FoLP) is an open answer set program with only unary and binary predicates, and such that a rule is either:

- a free rule:

$$a(s) \vee not\ a(s) \leftarrow, \quad (1)$$

or

$$f(s, t) \vee not\ f(s, t) \leftarrow \quad (2)$$

- a unary rule:

$$a(s) \leftarrow \beta(s), (\gamma_i(s, t_i), \delta_i(t_i))_{1 \leq i \leq m}, \psi \quad (3)$$

with  $\psi \subseteq \bigcup_{1 \leq i \neq j \leq m} \{t_i \neq t_j\}$  and  $m \in \mathbb{N}$ ,

- or a binary rule:

$$f(s, t) \leftarrow \beta(s), \gamma(s, t), \delta(t), \quad (4)$$

where in each rule above:

- $a$  is a unary predicate, and  $f$  is a binary predicate,
- $s, t$ , and  $(t_i)_{1 \leq i \leq m}$  are distinct terms,
- $\beta, \delta$ , and  $(\delta_i)_{1 \leq i \leq m}$  are sets of (possibly negated) unary predicates,
- $\gamma$ , and  $(\gamma_i)_{1 \leq i \leq m}$  are sets of (possibly negated) binary predicates,
- inequality does not appear in any  $\gamma: \neq \notin \gamma_i$ , for  $1 \leq i \leq m$ , and  $\neq \notin \gamma$ ;
- there is a positive atom that connects the head term  $s$  with any successor term which is a variable:  $\gamma_i^+ \neq \emptyset$ , if  $t_i$  is a variable, for every  $1 \leq i \leq m$ , and  $\gamma^+ \neq \emptyset$ , if  $t$  is a variable.

A predicate  $q$  in a FoLP  $P$  is said to be *free* if it occurs in a free rule in  $P$ .

**Example 3.2.** The following program  $P$  is a FoLP: it describes the fact that somebody who has read two different novels is a literature lover (unary rule  $r_1$ ), a novel is something written by a novelist (unary rule  $r_2$ ), and a novelist is somebody who wrote at least one novel (unary rule  $r_3$ ). There are three free rules describing binary predicates *read*, *wrBy*, and *wrote* as being free. Finally, there are two facts (unary rules with empty bodies):

$$\begin{aligned} r_1 : & \quad \text{LitLover}(X) \leftarrow \text{read}(X, Y_1), \text{read}(X, Y_2), \text{Novel}(Y_1), \\ & \quad \text{Novel}(Y_2), Y_1 \neq Y_2 \\ r_2 : & \quad \text{Novel}(X) \leftarrow \text{wrBy}(X, Y), \text{Novelist}(Y) \\ r_3 : & \quad \text{Novelist}(X) \leftarrow \text{wrote}(X, Y), \text{Novel}(Y) \\ r_4 : & \quad \text{read}(X, Y) \vee \text{not read}(X, Y) \leftarrow \\ r_5 : & \quad \text{wrBy}(X, Y) \vee \text{not wrBy}(X, Y) \leftarrow \\ r_6 : & \quad \text{wrote}(X, Y) \vee \text{not wrote}(X, Y) \leftarrow \\ f_1 : & \quad \text{Novel}(a) \leftarrow \\ f_2 : & \quad \text{Novelist}(b) \leftarrow \end{aligned}$$

For a FoLP  $P$ , we will denote with  $\text{upr}(P)$ ,  $\text{bpr}(P)$ ,  $\text{urul}(P)$ , and  $\text{brul}(P)$ , the sets of unary and binary predicates and unary and binary rules which occur in  $P$ , resp. For a unary rule  $r$  of type (3), the degree of  $r$ , denoted by  $\text{degree}(r)$ , is the number  $k$  of successor variables which appear in the rule. Intuitively, it indicates the maximum number of successor individuals needed to make the body of the rule true. The degree of a free rule is 0. For a unary predicate  $p$ :  $\text{degree}(p) = \max\{\text{degree}(r) \mid p \in \text{preds}(\text{head}(r))\}$ . Finally, the degree of a FoLP  $P$  is defined as:  $\text{degree}(P) = \sum_{p \in \text{upr}(P)} \text{degree}(p)$ . It is an over-approximation of the maximum number of successor individuals needed to satisfy all atoms of the form  $p(x)$ , where  $p \in \text{upr}(P)$ , for a given individual  $x$ .

**Example 3.3.** Let  $P$  be the FoLP from Example 3.2. Then,  $\text{degree}(\text{LitLover}) = 2$ ,  $\text{degree}(\text{Novel}) = 1$ ,  $\text{degree}(\text{Novelist}) = 1$ , and thus,  $\text{degree}(P) = 4$ .

*Forest models:* The forest model property of an OASP  $P$  is as follows: if a unary predicate  $p$  is satisfiable, then there exists a model which satisfies  $p$  that can be seen as an interconnected forest. The forest contains for each constant in  $P$  a tree having the constant as root, and possibly an additional tree with an anonymous root. The predicate checked to be satisfiable,  $p$ , belongs to the label of one of the root nodes.

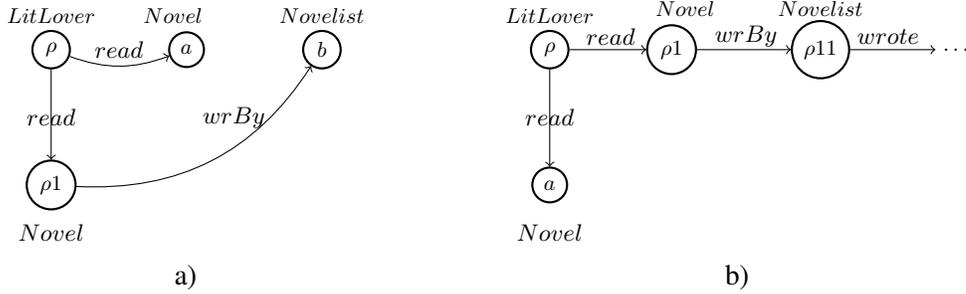


Figure 1: Forest model a) and tentative forest model b) for  $P$

**Definition 3.4.** Let  $P$  be a program. A predicate  $p \in \text{upr}(P)$  is forest satisfiable with respect to  $P$  if there exist an open answer set  $(U, M)$  of  $P$ ; an interconnected forest  $EF = (\{T_\rho\} \cup \{T_a \mid a \in \text{cts}(P)\}, ES)$ , where  $\rho$  is a constant, possibly from  $\text{cts}(P)$ ; and a labelling function  $ef : \{T_\rho\} \cup \{T_a \mid a \in \text{cts}(P)\} \cup A_{EF} \rightarrow 2^{\text{preds}(P)}$  s. t.:

- $p \in ef(\rho)$ ,
- $U = N_{EF}$ ,
- $ef(x) \in 2^{\text{upr}(P)}$ , when  $x \in T_\rho \cup \{T_a \mid a \in \text{cts}(P)\}$ ,
- $ef(x) \in 2^{\text{bpr}(P)}$ , when  $x \in A_{T_\rho}$ ,
- $M = \{p(x) \mid x \in N_{EF}, p \in ef(x)\} \cup \{f(x, y) \mid (x, y) \in A_{EF}, f \in ef(x, y)\}$ , and
- for every  $(z, z \cdot i) \in A_{EF}$ :  $ef(z, z \cdot i) \neq \emptyset$ .

We call such a pair  $(U, M)$  a forest model. A program  $P$  has the forest model property if every unary predicate  $p$  that is satisfiable with respect to  $P$ , is forest satisfiable with respect to  $P$ .

**Proposition 3.5** ([Heymans et al., 2007]). *FoLPs have the forest model property.*

**Example 3.6.** Consider again the FoLP  $P$  from Example 3.2. Figure 1 a) depicts a forest model which satisfies the unary predicate *LitLover*. Intuitively, the predicate is satisfied at the anonymous root  $\rho$  as there are two distinct read-successors of  $\rho$  where *Novel* holds:  $a$  and  $\rho1$ , and thus  $\text{LitLover}(\rho)$  is ‘supported’ by a ground version of rule  $r_1$ . In turn, *Novel* holds at  $\rho1$  as it is supported by rule  $r_2$  grounded such that  $X$  is replaced with  $\rho1$  and  $Y$  is replaced with  $b$ . Note that every atom in the model is finitely supported: there is no infinite chain of dependencies of atoms in the model. This is a property of (open) answer sets also known as ‘well-supportedness’ [Fages, 1991].

Consider in contrast the tentative model depicted in Figure 1 b). There,  $\text{Novel}(\rho1)$  is motivated by a *wrBy*-successor where *Novelist* holds, which at its turn is motivated by a *wrote*-successor where *Novel* holds, etc. The interpretation is not a model, as  $\text{Novel}(\rho1)$  is not finitely motivated. One of the main challenges when designing algorithms to reason with FoLPs is ensuring that every atom in a model is well-supported.

As explained in the Introduction, FoLPs can be used to simulate reasoning with  $\mathcal{SHOQ}$  ontologies. Thus, they can be viewed as an integrative formalism for reasoning with both ontologies and rules: [Feier and Heymans, 2009] introduces so-called *f-hybrid knowledge bases (fKBs)* which are pairs of the form  $(\Sigma, P)$ , where  $\Sigma$  is a  $\mathcal{SHOQ}$  KB and  $P$  is a FoLP. The semantics of fKBs is defined in terms of pairs of interpretations, one for each component, which share the same domain and which agree on the interpretation of common symbols between the two components. The salient feature of f-hybrid KBs is that they impose no restriction on the occurrence of DL symbols in the FoLP KB.

A concept/unary predicate satisfiability preserving, polynomial, and modular translation  $\Theta$  from  $\mathcal{SHOQ}$  to FoLPs is provided in [Feier and Heymans, 2009]. The translation extends to fKBs as follows: given an fKB  $(\Sigma, P)$ , its translation is simply  $\Theta(\Sigma) \cup P$ . Thus, any reasoning procedure for FoLPs can be employed to reason with fKBs. More details about the semantics, translation, and an extended example can be found in [Feier and Heymans, 2013].

## 4 Fully Enriched Automata

Fully enriched automata (FEAs) were introduced in [Bonatti et al., 2008] as a tool to reason in hybrid graded  $\mu$ -calculus. They accept forests as input. We describe them following [Bonatti et al., 2008].

For a set  $Y$ , we denote with  $B^+(Y)$  the set of positive Boolean formulas over  $Y$ , where *true* and *false* are also allowed and where  $\wedge$  has precedence over  $\vee$ . For a set  $X \subseteq Y$  and a formula  $\theta \in B^+(Y)$ , we say that  $X$  satisfies  $\theta$  iff assigning true to elements in  $X$  and assigning false to elements in  $Y - X$  makes  $\theta$  true. For  $b > 0$ , let  $D_b = \{\langle 0 \rangle, \langle 1 \rangle, \dots, \langle b \rangle\} \cup \{[0], [1], \dots, [b]\} \cup \{-1, \varepsilon, \langle root \rangle, [root]\}$ .

A fully enriched automaton (FEA) is a tuple  $A = \langle \Sigma, b, Q, \delta, q_0, \mathcal{F} \rangle$ , where  $\Sigma$  is a finite input alphabet,  $b > 0$  is a counting bound,  $Q$  is a finite set of states,  $\delta : Q \times \Sigma \rightarrow B^+(D_b \times Q)$  is a transition function,  $q_0 \in Q$  is an initial state, and  $\mathcal{F} = \{\mathcal{F}_1, \mathcal{F}_2, \dots, \mathcal{F}_k\}$ , where  $\mathcal{F}_1 \subseteq \mathcal{F}_2 \subseteq \dots \subseteq \mathcal{F}_k = Q$  is a *parity acceptance condition*. The number  $k$  of sets in  $\mathcal{F}$  is the *index* of the automaton.

A *run* of a FEA on a labeled forest  $(F, V)$  is an  $N_F \times Q$ -labeled tree  $(T_c, r)$  such that:

- $r(c) = (d, q_0)$ , for some root  $d$  in  $F$ , and
- for all  $y \in T_c$  with  $r(y) = (x, q)$  and  $\delta(q, V(x)) = \theta$ , there is a (possibly empty) set  $S \subseteq D_b \times Q$  such that  $S$  satisfies  $\theta$  and for all  $(d, s) \in S$ , the following hold:
  - if  $d \in \{-1, \varepsilon\}$ , then  $x \cdot d$  is defined and there is  $j \in \mathbb{N}^+$  such that  $y \cdot j \in T_c$  and  $r(y \cdot j) = (x \cdot d, s)$ ;
  - if  $d = \langle n \rangle$ , then there is a set  $M \subseteq succ_F(x)$  of cardinality  $n + 1$  such that for all  $z \in M$ , there is  $j \in \mathbb{N}^+$  such that  $y \cdot j \in T_c$  and  $r(y \cdot j) = (z, s)$ ;
  - if  $d = [n]$ , then there is a set  $M \subseteq succ_F(x)$  of cardinality  $n$  such that for all  $z \in succ_F(x) - M$ , there is  $j \in \mathbb{N}^+$  such that  $y \cdot j \in T_c$  and  $r(y \cdot j) = (z, s)$ ;
  - if  $d = \langle root \rangle$  ( $d = [root]$ ), then for some (all) root(s)  $c \in F$  there exists  $j \in \mathbb{N}^+$  such that  $y \cdot j \in T_c$  and  $r(y \cdot j) = (c, s)$ ;

If  $\theta$  above is true, then  $y$  does not need to have successors. Moreover, since no set  $S$  satisfies  $\theta = false$ , there cannot be any run that takes a transition with  $\theta = false$ . A run is *accepting* if each of its infinite paths  $\pi$  is accepting, that is if the minimum  $i$  for which  $Inf(\pi) \cap \mathcal{F}_i \neq \emptyset$ , where  $Inf(\pi)$  is the set of states occurring infinitely often in  $\pi$ , is even. The automaton accepts a forest iff there exists an accepting run of the automaton on the forest. The language of  $A$ , denoted  $\mathcal{L}(A)$ , is the set of forests accepted by  $A$ . We say that  $A$  is non-empty if  $\mathcal{L}(A) \neq \emptyset$ .

**Theorem 4.1** (Corollary 4.3 [Bonatti et al., 2008]). *Given a FEA  $A = \langle \Sigma, b, Q, \delta, q_0, \mathcal{F} \rangle$  with  $n$  states and index  $k$ , deciding whether  $\mathcal{L}(A) = \emptyset$  is possible in time  $(b + 2)^{\mathcal{O}(n^3 \cdot k^2 \cdot \log k \cdot \log b^2)}$ .*

## 5 From Forest Logic Programs to Fully Enriched Automata

In this section we show how satisfiability checking of unary predicates with respect to FoLPs can be reduced to emptiness checking for FEAs.

We start by introducing for every FoLP  $P$  and unary predicate  $p$  a class of FEAs  $A_{\rho, \theta}^{p, P}$ , where  $\rho$  is one of  $cts(P)$  or a new anonymous individual and  $\theta : cts(P) \cup \{\rho\} \rightarrow 2^{upr(P) \cup cts(P) \cup \{\rho\}}$  is a function which has the following properties:  $o_i \in \theta(o_i)$ , and  $o_j \notin \theta(o_i)$ , for every  $o_i, o_j \in cts(P) \cup \{\rho\}$ , such that  $o_i \neq o_j$ . Furthermore,  $p \in \theta(c)$ , where  $c$  is one of  $cts(P) \cup \{\rho\}$  and  $c$  is  $\rho$  if  $\rho \notin cts(P)$ . Intuitively  $A_{\rho, \theta}^{p, P}$  will accept forest models of  $p$  with respect to  $P$  encoded in a certain fashion: in particular, for every root in the forest model, the root node will appear in its own label; function  $\theta$  fixes a content for the label of each root of accepted forest models.

In the following, let  $d = degree(P)$ . We will also denote with  $PAT_P$  the set  $\{*\} \cup cts(P)$  of *term patterns*, where  $*$  stands for a generic anonymous individual: we say that a term  $t$  matches a term pattern  $pt$ , and write  $t \mapsto pt$  iff  $t = pt$ , when  $t$  is a constant. In all other cases, the match trivially holds. Term patterns will be used in our encoding as a unification mechanism: a variable will match with a constant or an anonymous individual, but a constant will match only with itself. The automaton  $A_{\rho, \theta}^{p, P}$  will run on forests labelled using the following alphabet:  $\Sigma = 2^S$ , where  $S = upr(P) \cup \{1, \dots, d\} \cup cts(P) \cup \{\rho\} \cup \{\uparrow_f^o \mid f \in bpr(P)\} \cup \{\downarrow_f^t \mid f \in bpr(P), t \in PAT_P\}$ .

Unlike the case for forest models, the arcs of forests accepted by FEAs are not labelled: as such, binary predicates occur in the label of nodes in an adorned form. These adorned predicates are either of the form  $\downarrow_f^t$ , in which case they represent an  $f$ -link between the predecessor of the labelled node, which has term pattern  $t$  and the node itself, or of the form  $\uparrow_f^o$ , in which case the current node is linked to a constant  $o$  from  $P$  via the binary predicate  $f$ . Additionally, besides unary predicates, labels might contain natural numbers and constants, which will be used as an addressing mechanism for successors of a given node and nodes which stand for constants in accepted forests, resp. The set of states of the automaton are as follows:  $Q = Q_i \cup Q_+ \cup Q_-$ , with:

- $Q_i = \{q_0, q_1\} \cup \{q_o \mid o \in cts(P) \cup \{\rho\}\} \cup \{q_{-k} \mid 1 \leq k \leq d\}$ ,
- $Q_+ = \{q_{t,a}, q_{t,r_a}, q_{t_1,t_2,u}, q_{t_1,t_2,r_f}, q_{k,t,*u} \mid t, t_1, t_2 \in PAT_P, a \in upr(P), f \in bpr(P), u \text{ is of the form } a, f, \text{ not } a \text{ or not } f, 1 \leq k \leq d, r_a \in urul(P), r_f \in brul(P)\}$ , and
- $Q_- = \{q_{\bar{t},a}, q_{\bar{t},r_a}, q_{\bar{t}_1,\bar{t}_2,u}, q_{\bar{t}_1,\bar{t}_2,r_f}, q_{\bar{k},\bar{t},*u} \mid t_1, t_2, t, a, f, u, k, r_a, \text{ and } r_f \text{ as above}\}$ .

We will refer to  $Q_+$  and  $Q_-$  as the positive and the negative states of  $A_{\rho, \theta}^{p, P}$ , resp. Intuitively, positive states are used to motivate the presence of atoms in an open answer set while negative states are used to motivate the absence of atoms in an open answer set.  $Q_i$  contains some additional states, like  $q_0$ , the initial state,  $q_1$ , a state which will be visited recursively in every node of the forest,  $q_o$ , a state corresponding to the initial visit of constant nodes, and  $q_{-k}$ , a state which asserts that for every node in an accepted forest there must be at most one successor which has  $k$  in the label.

We next describe the transition function of  $A_{\rho, \theta}^{p, P}$ . The initial transition prescribes that the automaton visits a root of the forest in state  $q_o$ , for every  $o \in \text{cts}(P) \cup \{\rho\}$ :

$$\delta(q_0, \sigma) = \bigwedge_{o \in \text{cts}(P) \cup \{\rho\}} (\langle \text{root} \rangle, q_o) \quad (5)$$

In every such state  $q_o$ , it should hold that  $o$  and only  $o$  is part of the label. Furthermore, the automaton justifies the presence and absence of each unary predicate  $a$  and adorned upward binary predicate in the label<sup>1</sup> by entering states  $q_{o,a}$ ,  $q_{o,o',f}$ ,  $q_{\bar{o},\bar{a}}$ , and  $q_{\bar{o},\bar{o}',\bar{f}}$  resp. At the same time every successor of the constant node is visited in state  $q_1$ :

$$\begin{aligned} \delta(q_o, \sigma) = & o \in \sigma \wedge \bigwedge_{o' \in \text{cts}(P) \cup \{\rho\} - \{o\}} o' \notin \sigma \wedge \bigwedge_{a \in \theta(o)} (\varepsilon, q_{o,a}) \wedge \bigwedge_{a \notin \theta(o)} (\varepsilon, q_{\bar{o},\bar{a}}) \wedge \\ & \bigwedge_{\uparrow_f' \in \theta(o)} (\varepsilon, q_{o,o',f}) \wedge \bigwedge_{\uparrow_f' \notin \theta(o)} (\varepsilon, q_{\bar{o},\bar{o}',\bar{f}}) \wedge ([0], q_1) \end{aligned} \quad (6)$$

Whenever the automaton finds itself in state  $q_1$  it tries to motivate the presence and absence of each unary and each adorned binary predicate in its label and then it recursively enters the same state into each successor of the current node. It also ensures that for each integer  $1 \leq k \leq d$ , the labels of each but one successor do not contain  $k$ :

$$\begin{aligned} \delta(q_1, \sigma) = & \bigwedge_{a \in \sigma} (\varepsilon, q_{*,a}) \wedge \bigwedge_{a \notin \sigma} (\varepsilon, q_{*,\bar{a}}) \wedge \bigwedge_{\downarrow_f^t \in \sigma} (\varepsilon, q_{t,*,f}) \wedge \bigwedge_{\downarrow_f^t \notin \sigma} (\varepsilon, q_{\bar{t},*,\bar{f}}) \wedge \\ & \bigwedge_{\uparrow_f' \in \sigma} (\varepsilon, q_{*,o',f}) \wedge \bigwedge_{\uparrow_f' \notin \sigma} (\varepsilon, q_{*,\bar{o}',\bar{f}}) \wedge ([0], q_1) \wedge \bigwedge_{1 \leq k \leq d} ([1], q_{-k}) \end{aligned} \quad (7)$$

$$\delta(q_{-k}, \sigma) = k \notin \sigma \quad (8)$$

To motivate the presence of a unary/binary predicate in the label of a node, the automaton checks whether the given predicate is free (we assume that  $\text{free}(a)$  evaluates to true if  $a$  is free, and, to false, otherwise) or finds a unary/binary rule which supports the predicate. Note in both cases, the distinction concerning the term pattern for the node where the predicate has to hold. In the case of unary predicates, if the node is a constant, there is first a preliminary check that we are at the right node - this is needed as later the automaton will visit all roots in this state. In the case of binary predicates, depending on the term pattern, the label is checked for different types of adorned binary atoms. In all cases, only rules whose head terms match the given term patterns are chosen to motivate the presence of predicates in the label.

$$\delta(q_{*,a}, \sigma) = a \in \sigma \wedge \left( \text{free}(a) \vee \bigvee_{r_a : a(s) \leftarrow \beta \in P} (\varepsilon, q_{*,r_a}) \right) \quad (9)$$

$$\delta(q_{o,a}, \sigma) = o \notin \sigma \vee a \in \theta(o) \wedge \left( \text{free}(a) \vee \bigvee_{r_a : a(s) \leftarrow \beta \in P, s \mapsto o} (\varepsilon, q_{o,r_a}) \right) \quad (10)$$

<sup>1</sup>As constants have no predecessors in the forest, there will be no adorned downward predicates in the label.

$$\delta(q_{t,*,f}, \sigma) = \downarrow_f^t \in \sigma \wedge \left( \text{free}(f) \vee \bigvee_{r_f: f(s,v) \leftarrow \beta \in P, s \mapsto t, v \mapsto *} (\varepsilon, q_{v,*,r_f}) \right) \quad (11)$$

$$\delta(q_{t,o,f}, \sigma) = \uparrow_f^o \in \sigma \wedge \left( \text{free}(f) \vee \bigvee_{r_f: f(s,v) \leftarrow \beta \in P, s \mapsto t, v \mapsto o} (\varepsilon, q_{t,o,r_f}) \right) \quad (12)$$

Let  $r_a : a(s) \leftarrow \beta(s), (\gamma_i(s, v_i), \delta_i(v_i))_{1 \leq i \leq m}, \psi$  be a unary rule. Then, we denote with  $J_{r_a}$  a multiset  $\{j_i \mid 1 \leq i \leq m, j_i \in \{1, \dots, d\} \cup \text{cts}(P)\}$  such that:

- for every  $j_i \in J_{r_a}, v_i \in \text{cts}(P)$  implies  $j_i = v_i$ , and
- for every  $j_i, j_l \in J_{r_a}, v_i \neq v_l \in \psi$  implies  $j_i \neq j_l$ .

Intuitively, a multiset provides a way to satisfy the successor part of a unary rule in a forest model by identifying the successor terms of the rule with either successors of the current element in the model or constants in the program. Let  $\mathcal{MJ}$  be the set of all such multisets. The following transition describes how the body of such a rule is checked to be satisfiable:

$$\delta(q_{t,r_a}, \sigma) = \bigwedge_{u \in \beta} (\varepsilon, q_{*,t,u}) \wedge \bigvee_{J_{r_a} \in \mathcal{MJ}} \left( \bigwedge_{k=1}^d \bigwedge_{j_i=k, j_i \in J_{r_a}} \bigwedge_{u \in \gamma_i \cup \delta_i} (\langle 0 \rangle, q_{k,t,*,u}) \wedge \bigwedge_{o \in \text{cts}(P)} \bigwedge_{j_i=o, j_i \in J_{r_a}} \bigwedge_{u \in \gamma_i \cup \delta_i} (\varepsilon, q_{t,o,u}) \right) \quad (13)$$

The state  $q_{k,t,*,u}$  checks that the (possibly negated) unary or adorned binary predicate  $u$  is (is not) part of the label of the  $k$ -th successor of a given node; we thus define:

$$\delta(q_{k,t_1,t_2,u}, \sigma) = k \in \sigma \wedge \bigwedge_{j \neq k} j \notin \sigma \wedge (\varepsilon, q_{t_1,t_2,u}) \quad (14)$$

The state  $q_{t_1,t_2,u}$  can be seen as a multi-state with different transitions depending on its arguments (two transitions have already been introduced as rules (11) and (12) above): if  $t_2 = *$ , one has to justify the presence/absence of  $u$  in the label of the current node; otherwise, when  $t_2 = o$ , one has to justify it from the label of the root node corresponding to constant  $o$ : note that, as it is not possible to jump directly to a given root node in the forest, nor to enforce that there will be a single root node corresponding to each constant, in transition (17) we visit each root node in state  $q_{o,a}$ :

$$\delta(q_{t_1,t_2,u}, \sigma) = \begin{cases} (\varepsilon, q_{*,a}), & \text{if } t_2 = * \text{ and } u = a & (15) \\ ([root], q_{o,a}), & \text{if } t_2 = o \text{ and } u = a & (16) \\ a \notin \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a & (17) \\ a \notin \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a & (18) \\ \downarrow_f^t \notin \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f & (19) \\ \uparrow_f^o \notin \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f & (20) \end{cases}$$

For binary rules:  $r_f : f(s, v) \leftarrow \beta(s), \gamma(s, v), \delta(v)$ , where  $v$  is grounded using an anonymous individual, the check involves looking also to the predecessor node to see if the local part of the rule is satisfied. When  $v$  is grounded using a constant, the local part of the rule is checked at the current node and the successor part at the respective constant. Note that the first term pattern in the first conjunct in both rules (21) and (22) is irrelevant as the set  $\beta$  contains only unary predicates:

$$\delta(q_{t,*,r_f}, \sigma) = \bigwedge_{u \in \beta} (-1, q_{*,t,u}) \wedge \bigwedge_{u \in \gamma \cup \delta} (\varepsilon, q_{t,*,u}) \quad (21)$$

$$\delta(q_{t,o,r_f}, \sigma) = \bigwedge_{u \in \beta} (\varepsilon, q_{*,t,u}) \wedge \bigwedge_{u \in \gamma \cup \delta} (\varepsilon, q_{t,o,u}) \quad (22)$$

The transitions of the automaton in the negative states, i.e. the states which are used to motivate the absence of certain unary/binary predicates in the labels of the forest can be seen as dual versions of the ones for the counterpart positive states:

$$\delta(q_{*,\bar{a}}, \sigma) = a \notin \sigma \wedge \bigwedge_{r_a : a(s) \leftarrow \beta \in P} (\varepsilon, q_{*,r_a}) \quad (23)$$

$$\delta(q_{o,\bar{a}}, \sigma) = o \notin \sigma \vee a \notin \theta(o) \wedge \bigwedge_{r_a : a(s) \leftarrow \beta \in P, s \rightarrow o} (\varepsilon, q_{o,r_a}) \quad (24)$$

$$\delta(q_{t,*,\bar{f}}, \sigma) = \downarrow_f^t \notin \sigma \wedge \bigwedge_{r_f : f(s,v) \leftarrow \beta \in P, s \rightarrow t, v \rightarrow *} (\varepsilon, q_{v,*,r_f}) \quad (25)$$

$$\delta(q_{t,o,\bar{f}}, \sigma) = \uparrow_f^o \notin \sigma \wedge \bigwedge_{r_f : f(s,v) \leftarrow \beta \in P, s \rightarrow t, v \rightarrow o} (\varepsilon, q_{v,*,r_f}) \quad (26)$$

$$\delta(q_{\bar{t},\bar{r}_a}, \sigma) = \bigvee_{u \in \beta} (\varepsilon, q_{*,t,u}) \vee \bigwedge_{J_{r_a} \in \mathcal{MJ}} \left( \bigvee_{k=1}^d \bigvee_{j_i=k, j_i \in J_{r_a}} \bigvee_{u \in \gamma_i \cup \delta_i} ([0], q_{k,t,*,u}) \right) \vee \bigvee_{o \in cts(P)} \bigvee_{j_i=o, j_i \in J_{r_a}} \bigvee_{u \in \gamma_i \cup \delta_i} (\varepsilon, q_{\bar{t},o,u}) \quad (27)$$

$$\delta(q_{k,t,*,\bar{u}}, \sigma) = k \notin \sigma \vee (\varepsilon, q_{k,t,*,u}) \quad (28)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (29)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (30)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (31)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (32)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (33)$$

$$\delta(q_{\bar{t}_1, \bar{t}_2, \bar{u}}, \sigma) = \begin{cases} (\varepsilon, q_{*,\bar{a}}), & \text{if } t_2 = * \text{ and } u = a \\ ([root], q_{o,\bar{a}}), & \text{if } t_2 = o \text{ and } u = a \\ a \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } a \\ a \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } a \\ \downarrow_f^t \in \sigma, & \text{if } t_2 = * \text{ and } u = \text{not } f \\ \uparrow_f^o \in \theta(o), & \text{if } t_2 = o \text{ and } u = \text{not } f \end{cases} \quad (34)$$

$$\delta(\overline{q_{t,*,r_f}}, \sigma) = \bigvee_{u \in \beta} (-1, \overline{q_{*,t,u}}) \vee \bigvee_{u \in \gamma \cup \delta} (\varepsilon, \overline{q_{t,*,u}}) \quad (35)$$

$$\delta(\overline{q_{t,o,r_f}}, \sigma) = \bigvee_{u \in \beta} (\varepsilon, \overline{q_{*,t,u}}) \vee \bigvee_{u \in \gamma \cup \delta} (\varepsilon, \overline{q_{t,o,u}}) \quad (36)$$

Finally we specify the parity acceptance condition. The index of the automaton is 2, with  $\mathcal{F}_1 = \{q_{t,a}, q_{t_1,t_2,f} \mid a \in \text{upr}(P), f \in \text{bpr}(P), t, t_1, t_2 \in \text{PAT}_P\}$  and  $\mathcal{F}_2 = Q$ . Intuitively, paths in a run of the automaton correspond to dependencies of literals in the accepted model and by disallowing the infinite occurrence on a path of states associated to atoms in the model we ensure that only well-supported models are accepted.

**Theorem 5.1.** *Let  $P$  be a FoLP and  $p$  be a unary predicate symbol. Then,  $p$  is satisfiable with respect to  $P$  iff there exists an automaton  $A_{\rho,\theta}^{p,P}$  such that  $\mathcal{L}(A_{\rho,\theta}^{p,P}) \neq \emptyset$ .*

*Proof Sketch.* ( $\Rightarrow$ ): Assume  $p$  is satisfiable with respect to  $P$ . Then, by Prop. 3.5,  $p$  is satisfied by a forest model  $(U, M)$ . Let  $(EF, ef)$ , with  $EF = (F, ES)$  be the labelled forest which induces  $(U, M)$ , as in Definition 3.4. Then, let  $l : \{T_c \mid c \in \text{cts}(P) \cup \{\rho\}\}$  be a labelling function such that for every  $y \in \{T_c \mid c \in \text{cts}(P) \cup \{\rho\}\}$ ,  $l(y)$  is the least set containing: (i)  $ef(y)$ , (ii)  $\{\uparrow_f^o \mid f \in ef(y, o), o \in \text{cts}(P)\}$ , (iii)  $\{\downarrow_f^y \mid f \in ef(z, y), z = \text{prec}_F(y), z \notin \text{cts}(P)\}$ ,  $\{\downarrow_f^z \mid f \in ef(z, y), z = \text{prec}_F(y), z \in \text{cts}(P)\}$ , (iv)  $\{y\}$ , when  $y \in \text{cts}(P) \cup \rho$ , and (v)  $\{i\}$  if  $y = z \cdot i$ .

We define an automaton  $A_{\rho,\theta}^{p,P}$  which accepts  $(F, l)$ . Let  $\rho$  be the same as its homonym in the considered forest model and let  $\theta$  be such that  $\theta(o) = l(o)$ , for every  $o \in \text{cts}(P) \cup \{\rho\}$ . We construct a run  $(T_c, r)$  of  $A_{\rho,\theta}^{p,P}$  on  $(F, l)$  by first setting  $r(c) = (\phi, q_0)$ , where  $\phi$  is the root of some forest in  $F$ . Then, for each  $o \in \text{cts}(P) \cup \{\rho\}$ , we introduce a successor of  $c, c \cdot i$ , such that  $r(c \cdot i) = (o, q_o)$ . We then proceed inductively with the construction by maintaining an invariant which ensures the existence of a run. More precisely, for every  $w \in T_c$  it holds that:

- $r(w) = (y, q_{*,a})$  implies  $a \in l(y)$ ;
- $r(w) = (y, q_{o,a})$  implies  $o \notin l(y)$  or  $a \in \theta(o)$ ;
- $r(w) = (y, q_{t,r_a})$  implies  $a \in l(y)$ ,  $a$  is not free, and there is a rule  $s \in P_U^M$  derived from  $r_a$  such that  $\text{head}(s) = a(y)$ ,  $M \models \text{body}(s)$ , and  $\max_{b \in \text{body}(s)} (\text{level}(b, M)) < \text{level}(a(y), M)$ ;
- $r(w) = (y, q_{t,*,u})$  implies  $a \in l(y)$ , if  $u = a$ ;  $a \notin l(y)$ , if  $u = \text{not } a$ ;  $\downarrow_f^t \in l(y)$ , if  $u = f$ ;  $\downarrow_f^t \notin l(y)$ , if  $u = \text{not } f$ ;
- $r(w) = (y, q_{t,o,u})$  implies  $a \in l(o)$ , if  $u = a$ ;  $a \notin l(o)$ , if  $u = \text{not } a$ ;  $\uparrow_f^o \in l(y)$ , if  $u = f$ ;  $\uparrow_f^o \notin l(y)$ , if  $u = \text{not } f$ ;
- $r(w) = (y, q_{k,t,*,u})$  implies  $k \in l(y)$ , and  $j \notin l(y)$ , for every  $1 \leq j \neq k \leq d$ ;  $a \in l(y)$ , if  $u = a$ ;  $a \notin l(y)$ , if  $u = \text{not } a$ ;  $\downarrow_f^t \in l(y)$ , if  $u = f$ ;  $\downarrow_f^t \notin l(y)$ , if  $u = \text{not } f$ ;
- $r(w) = (y, q_{t,*,r_f})$  implies  $\downarrow_f^t \in l(y)$ ,  $f$  is not free, and there is a rule  $s \in P_U^M$  derived from  $r$  such that  $\text{head}(s) = f(\text{prec}_F(y), y)$ ,  $M \models \text{body}(s)$ , and  $\max_{b \in \text{body}(s)} \text{level}(b, M) < \text{level}(f(\text{prec}_F(y), y), M)$ ;

- $r(w) = (y, q_{t,o,r_f})$  implies  $\uparrow_f^o \in l(y)$ ,  $f$  is not free, and there is a rule  $s \in P_U^M$  derived from  $r$  such that  $head(s) = f(y, o)$ ,  $M \models body(s)$ , and  $\max_{b \in body(s)} level(b, M) < level(f(y, o), M)$ ;
- $r(w) = (y, q_{t,a})$  implies  $a \notin l(y)$ ;
- $r(w) = (y, q_{t,r_a})$  implies  $a \notin l(y)$ ;
- $r(w) = (y, q_{t,*,u})$  implies  $a \notin l(y)$ , if  $u = a$ ;  $a \in l(y)$ , if  $u = not\ a$ ;  $\downarrow_f^t \notin l(y)$ , if  $u = f$ ;  $\downarrow_f^t \in l(y)$ , if  $u = not\ f$ ;
- $r(w) = (y, q_{t,o,f})$  implies  $a \notin l(o)$ , if  $u = a$ ;  $a \in l(o)$ , if  $u = not\ a$ ;  $\uparrow_f^o \notin l(y)$ , if  $u = f$ ;  $\uparrow_f^o \in l(y)$ , if  $u = not\ f$ ;
- $r(w) = (y, q_{k,t,*,u})$  implies  $k \notin l(y)$  or  $a \notin l(y)$ , if  $u = a$ ;  $a \in l(y)$ , if  $u = not\ a$ ;  $\downarrow_f^t \notin l(y)$ , if  $u = f$ ;  $\downarrow_f^t \in l(y)$ , if  $u = not\ f$ ;
- $r(w) = (y, q_{t,*,f})$  implies  $\downarrow_f^t \notin l(y)$ ;
- $r(w) = (y, q_{t,o,r_f})$  implies  $\uparrow_f^o \notin l(y)$ .

We show how the invariant is preserved in two cases of the construction:

- Assume  $r(w) = (y, q_{t,a})$ , for some  $w \in T_c$ . Then, from the IH:  $a \in l(y)$ , and  $a(y) \in M$ . Then, there must be a finite  $n$  such that  $level(a(y), M) = n$  and some rule  $s$  in  $P_U^M$  such that  $\max_{b \in body(s)} (level(b, M)) = n - 1$  (from which  $a(y)$  has been derived at iteration  $n$ ). Let  $r_a$  be the rule in  $P$  from which  $s$  has been derived and let  $w \cdot i$  be a successor of  $w$  in  $T_r$  such that  $r(w \cdot i) = (y, q_{t,r_a})$ . The invariant is preserved.
- Assume  $r(w) = (y, q_{t,r_a})$ , for some  $w \in T_r$ . Then, from the IH:  $a \in l(y)$ ,  $a$  is not free, and there exists some rule  $s$  in  $P_U^M$  derived from  $r_a$ :  $a(y) \leftarrow \beta^+(y) \cup \bigcup_{1 \leq i \leq m} (\gamma_i^+(y, z_i) \cup \delta_i^+(z_i))$  such that  $M \models body(s)$  and  $\max_{b \in body(s)} (level(b, M)) < level(a(y), M)$ . Note that  $M \models \beta(y) \cup \bigcup_{i=1}^m (\gamma_i(y, z_i) \cup \delta_i(z_i))$ . As  $(U, M)$  is a forest model, each  $z_m$  must be of the form  $y \cdot k$ , for some  $1 \leq k \leq d$ , or of the form  $o \in cts(P)$ . Let  $J_{r_a}$  be a multiset such that  $j_i = z_i$ , if  $z_i \in cts(P)$  and  $j_i = k$  if  $z_i = y \cdot k$ . Then, we introduce the following successors of  $w$  in  $T_c$  (denoted just by their label):
  - $(y, q_{*,t,u})$ , for every  $u \in \beta$ : the invariant holds as  $M \models \beta(y)$ .
  - $(y \cdot k, q_{k,t,*,u})$ , for every  $1 \leq k \leq d$ ,  $i$  such that  $j_i = k$ , and  $u \in \gamma_i \cup \delta_i$ : the invariant holds as  $M \models \gamma_i(y, y \cdot k) \cup \delta_i(y \cdot k)$ . It is also the case that  $k \in l(y \cdot k)$  and  $j \notin l(y \cdot k)$ , for every  $1 \leq j \neq k \leq d$ .
  - $(y, q_{t,o,u})$ , for every  $o$  and  $i$  such that  $j_i = o$  and  $u \in \gamma_i \cup \delta_i$ : the invariant holds as  $M \models \gamma_i(y, o) \cup \delta_i(o)$ .

To see that the run is accepting, i.e. that on every path of  $T_c$  there are finitely many occurrences of states of the form  $q_{t,a}$  or  $q_{t_1,t_2,f}$ , assume that every  $w \in T_c$  for which  $r(w) = (y, q_{t,a})$ ,  $r(w) = (y, q_{t,*,f})$ , or  $r(w) = (y, q_{t,o,f})$  is annotated with  $level(a(y), M)$ ,  $level(f(prec(y), y), M)$ , or  $level(f(y, o), M)$ , resp. From the invariant, it follows that level annotations decrease along each path of  $T_c$ . But the level of every atom in an open answer set is finite. Thus, the number of level annotations, and consequently the number of occurrences of such states must be finite.

( $\Leftarrow$ ): Assume that there exists an automaton  $A_{\rho, \theta}^{p, P}$  such that  $\mathcal{L}(A_{\rho, \theta}^{p, P}) \neq \emptyset$ . Then, there exists a labelled forest  $(F', f')$  and an accepting run  $(T_c, r)$  on  $(F', f')$  such that  $r(c) = (\phi, q_0)$ , for some root  $\phi$  in  $F'$ . Let  $F$  be the forest containing the nodes  $y \in N_{F'}$  for which either (i) there exists some  $w \in T_c$  such that  $r(w) = (y, q_0)$  or (ii)  $\text{prec}_{F'}(y) \in N_F$  and there exists some  $w \in T_c$  such that  $r(w) = (y, q_{k, t_1, t_2, u})$ . Assume  $C$  is the set of roots in  $F$ . Then let  $\eta : N_F \rightarrow N_F \cup \text{cts}(P) \cup \{\rho\}$  be as follows:  $\eta(y) = \begin{cases} o_i, & \text{if } o_i \in l(y), \text{ and } o_j \notin l(y), \text{ for } o_j \in \text{cts}(P) \cup \{\rho\} - \{o_i\} \\ \eta(c) \cdot s, & \text{if } y = c \cdot s, \text{ for } c \in C \end{cases}$  and let  $l$  be the following labeling

function for  $N_F$ :  $l(y) = \begin{cases} \theta(\eta(y)), & \text{if } \eta(y) \in \text{cts}(P) \\ f'(y), & \text{if } \eta(y) \in N_F - \text{cts}(P) \end{cases}$ .

Also, let:  $U = \{\eta(y) \mid y \in N_F\}$ ,  $M = \{a(\eta(y)) \mid a \in l(y) \cap \text{upr}(P) \wedge y \in N_F\} \cup \{f(\eta(z), \eta(z) \cdot i) \mid \downarrow_f^* \in l(y) \wedge y = z \cdot i \wedge y \in N_F\} \cup \{f(\eta(y), o_i) \mid \uparrow_f^{o_i} \in l(y) \wedge y \in N_F\}$ .

We show that  $(U, M)$  is a forest model of  $P$  by showing that:

(i)  $M$  is a model of  $P_U^M$ , i.e every rule in  $P_U^M$  is satisfied by  $M$ .

Let  $r' : a(\eta(y)) \leftarrow \beta^+(\eta(y)), (\gamma_i^+(\eta(y), \eta(y_i)), \delta_i^+(\eta(y_i)))_{1 \leq i \leq m}$  be a rule in  $P_U^M$  derived from a unary rule  $r : a(s) \leftarrow \beta(s), \cup_{i=1}^m (\gamma_i(s, t_i), \delta_i(t_i)), \psi$  in  $P$ . Let  $J_r$  be the multiset formed of elements  $j_i$ ,  $1 \leq i \leq m$ , such that:

$$j_i = \begin{cases} \eta(y_i), & \text{if } \eta(y_i) \in \text{cts}(P), \\ k, & \text{if } \eta(y_i) = \eta(x) \cdot k. \end{cases}$$

Assume  $M \models \text{body}(r')$ , but  $M \not\models a(\eta(y))$ . Then,  $a \notin l(y)$  and there must be some  $w \in T_c$  such that either:

- $r(w) = (y, q_{\bar{x}, \bar{a}})$ . Then, for every rule  $r_a : a(s) \leftarrow \beta \in P$ , there must be a node  $w_{r_a} \in T_c$  such that  $r(w_{r_a}) = (y, q_{\bar{x}, \bar{r}_a})$ . This holds also for rule  $r$ . Then, one of the following holds:
  - \* there exists  $w' \in T_c$  such that  $r(w') = (y, q_{\bar{x}, \bar{u}})$ , for some  $u \in \beta$ : then, either  $u = a$  and  $(y, q_{\bar{x}, \bar{a}}) \in T_c$  and thus  $a \notin l(y)$  or  $M \not\models a(\eta(y))$  – contradiction, or for some  $u = \text{not } a$ ,  $a \in l(y)$  or  $M \models a(\eta(y))$  – contradiction.
  - \* for every multiset  $J_{r_a}$  as in transition rule (14) (including  $J_r$  above) and every  $j_i \in J_{r_a}$  either:
    - there exist  $1 \leq k \leq d$ ,  $1 \leq i \leq m$ , and  $u \in \gamma_i \cup \delta_i$  such that  $j_i = k$  and for every  $y \cdot g \in F$ , there is a node  $w_g \in T_c$  such that  $r(w_g) = (y \cdot g, q_{\bar{k}, \bar{t}, \bar{x}, \bar{u}})$ : then, there is  $w_k \in T_c$  such that  $r(w_k) = (y \cdot k, q_{\bar{k}, \bar{t}, \bar{x}, \bar{u}})$  and either (1)  $k \notin l(y \cdot k)$  – contradiction, (2)  $u = a$ ,  $a \notin l(y \cdot k)$ :  $a(\eta(y \cdot k)) \notin M$  or  $M \not\models a(\eta(y_i))$ , and thus  $M \not\models \delta_i(\eta(y_i))$  – contradiction, (3)  $u = \text{not } a$ ,  $a \in l(y \cdot k)$ :  $a(\eta(y \cdot k)) \in M$  or  $M \models a(\eta(y_i))$ , and thus  $M \not\models \delta_i(\eta(y_i))$  – contradiction, (4)  $u = f$ ,  $\downarrow_f^t \notin l(y \cdot k)$ :  $f(\eta(y), \eta(y \cdot k)) \notin M$  or  $M \not\models f(\eta(y), \eta(y_i))$ , and thus  $M \not\models \gamma_i(\eta(y), \eta(y_i))$  – contradiction, (5) for some  $u = \text{not } f$ ,  $\downarrow_f^t \in l(y \cdot k)$ :  $f(\eta(y), \eta(y \cdot k)) \in M$  or  $M \models f(\eta(y), \eta(y_i))$ , and thus  $M \not\models \gamma_i(\eta(y), \eta(y_i))$  – contradiction.
    - there exists  $1 \leq i \leq m$  such that  $j_i = o$ , for some  $o \in \text{cts}(P)$ , a node  $w_o \in T_c$ , and  $u \in \gamma_i \cup \delta_i$  such that  $r(w_o) = (y, q_{\bar{t}, \bar{o}, \bar{u}})$ : similar to above we reach a contradiction with the fact that  $M \models \gamma_i(\eta(y), o) \cup \delta_i(o)$ .
- $r(w) = (y, q_{\bar{o}, \bar{a}})$  with  $\eta(y) = o$ . Then,  $o \notin l(y) = \theta(o)$  – contradiction or  $a \notin \theta(o)$  and for every rule  $r_a : a(s) \leftarrow \beta \in P$ , such that  $s \mapsto o$  there must be a node  $w_{r_a} \in T_c$  such that  $r(w_{r_a}) = (y, q_{\bar{o}, \bar{r}_a})$  – similar to above.

Thus, in each case we obtained a contradiction and  $M \models a(\eta(y))$ : every unary rule is satisfied by  $M$ . Similarly it can be shown that every binary rule is satisfied as well.

- (i)  $M$  is minimal:  $M$  is a minimal model of  $P_U^M$ : from the fact that  $(T_c, r)$  is accepting, it follows that every path starting at a state in  $Q^+$  must be finite. For every node  $w \in T_c$ , such that  $r(w) = (y, q)$ , for some  $q \in Q^+$ , let  $d(w) = \begin{cases} 0, & \text{if } w \text{ has no successors in } T_c, \\ 1 + \max_{w \cdot i \in T_c} (d(w \cdot i)), & \text{otherwise.} \end{cases}$

We show by induction on  $d(w)$  that the following hold:

- $r(w) = (y, q_{x,a})$  implies  $a(\eta(y)) \in \mathcal{M}(P_U^M)$ ,
- $r(w) = (y, q_{o,a})$  implies  $o \notin l(y)$  or  $a(o) \in \mathcal{M}(P_U^M)$ ,
- $r(w) = (y, q_{t,r_a})$  implies  $P_U^M$  contains a rule  $a(\eta(y)) \leftarrow \beta$  such that  $\mathcal{M}(P_U^M) \models \beta$ ,
- $r(w) = (y, q_{t,x,r_f})$  implies  $y = z \cdot i$ , for some  $i$ , and  $P_U^M$  contains  $f(\eta(z), \eta(z) \cdot i) \leftarrow \beta$  such that  $\mathcal{M}(P_U^M) \models \beta$ ,
- $r(w) = (y, q_{t,o,r_f})$  implies  $P_U^M$  contains  $f(\eta(y), o) \leftarrow \beta$  such that  $\mathcal{M}(P_U^M) \models \beta$ ,
- $r(w) = (y, q_{k,t,x,u})$  implies  $y = z \cdot i$ ,  $k \in l(y)$ , for every  $j \neq k$ :  $j \notin l(y)$ , and:  $a(\eta(y)) \in \mathcal{M}(P_U^M)$ , if  $u = a$ ;  $a(\eta(y)) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } a$ ;  $f(\eta(z), \eta(z) \cdot i) \in \mathcal{M}(P_U^M)$ , if  $u = f$ ;  $f(\eta(z), \eta(z) \cdot i) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } f$ ;
- $r(w) = (y, q_{t,x,u})$  implies  $y = z \cdot i$ , and:  $a(\eta(y)) \in \mathcal{M}(P_U^M)$ , if  $u = a$ ;  $a(\eta(y)) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } a$ ;  $f(\eta(z), \eta(z) \cdot i) \in \mathcal{M}(P_U^M)$ , if  $u = f$ ;  $f(\eta(z), \eta(z) \cdot i) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } f$ ;
- $r(w) = (y, q_{t,o,u})$  implies:  $a(o) \in \mathcal{M}(P_U^M)$ , if  $u = a$ ;  $a(o) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } a$ ;  $f(\eta(y), o) \in \mathcal{M}(P_U^M)$ , if  $u = f$ ;  $f(\eta(y), o) \notin \mathcal{M}(P_U^M)$ , if  $u = \text{not } f$ .

*Induction base:* assume  $w$  is a leaf in  $T_c$  and  $r(w) = (y, q)$ , for some  $q \in Q^+$  ( $d(w) = 0$ ). Then, one of the following holds:

- $r(w) = (y, q_{t,a})$  and  $a$  is free: in this case  $a(\eta(y)) \in M$  and thus  $P_U^M$  will contain rule  $a(\eta(y)) \leftarrow$ . Thus,  $a(\eta(y)) \in \mathcal{M}(P_U^M)$ .
- $r(w) = (y, q_{t_1,t_2,f})$  and  $f$  is free: similar to above.
- $r(w) = (y, q_{t_1,t_2,u})$  and  $u = \text{not } a$  or  $u = \text{not } f$ : from the fact that  $(T_r, t)$  is a run and transition rules (17-20), it follows that  $a \notin l(y)$  or  $\downarrow_f^{t_2} (t_2 = *) / \uparrow_f^o (t_2 = o) \notin l(y)$ . Then, the claim follows from the definition of  $M$ .

*Induction step:* consider a non-leaf node  $w \in T_c$  ( $d(w) > 0$ ). We will analyse the case when  $r(w) = (y, q_{t,r_a})$ : then, for every  $u \in \beta$  there is a successor  $w \cdot i_{\beta,u}$  of  $w$  such that  $r(w \cdot i_{\beta,u}) = (y, q_{x,t,u})$  and there exists a multiset  $J_{r_a}$  and successors  $w \cdot m_{k,i,u}$  and  $w \cdot m_{o,i,u}$  for  $w$  such that:

- $r(w \cdot m_{k,i,u}) = (y \cdot z_{k,i,u}, q_{k,t,x,u})$ , for all pairs  $(k, i)$  such that  $j_i = k$  and  $u \in \gamma_i \cup \delta_i$ ;
- $r(w \cdot m_{o,i,u}) = (y, q_{t,o,u})$ , for all pairs  $(o, i)$  such that  $j_i = o$  and  $u \in \gamma_i \cup \delta_i$ .

From the IH, it follows that:

- $\mathcal{M}(P_U^M) \models u(\eta(y))$ , for every  $u \in \beta$ , and thus  $\mathcal{M}(P_U^M) \models \beta(\eta(y))$  (\*1),

- $\mathcal{M}(P_U^M) \models u(\eta(y), \eta(y) \cdot z_{k,i,u})$ , for every  $u \in \gamma_i$  and  $\mathcal{M}(P_U^M) \models u(\eta(y) \cdot z_{k,i,u})$ , for every  $u \in \delta_i$  and  $k \in l(\eta(y) \cdot z_{k,i,u})$ : as there is a unique successor  $y \cdot z_k$  of  $y$  such that  $k \in l(y \cdot z_k)$ , it follows that:  $\mathcal{M}(P_U^M) \models u(\eta(y), \eta(y) \cdot z_k)$ , for every  $u \in \gamma_i$  and  $\mathcal{M}(P_U^M) \models u(\eta(y) \cdot z_k)$ , for every  $u \in \delta_i$  and thus  $\mathcal{M}(P_U^M) \models \gamma_i(\eta(y), \eta(y) \cdot z_k) \cup \delta_i(\eta(y) \cdot z_k)$  (\*2),
- $\mathcal{M}(P_U^M) \models u(\eta(y), o)$ , for every  $u \in \gamma_i$  and  $\mathcal{M}(P_U^M) \models u(o)$ , for every  $u \in \delta_i$ , where  $j_i = o$ , and thus  $\mathcal{M}(P_U^M) \models \gamma_i(\eta(y), o) \cup \delta_i(o)$  (\*3).

From (\*1)-(\*3) and the fact that  $j_i \neq j_l$  implies  $z_{j_i} \neq z_{j_l}$ , it follows that  $\mathcal{M}(P_U^M) \models \beta(\eta(y)) \cup \bigcup_{1 \leq k \leq d} (\gamma_i(\eta(y), \eta(y) \cdot z_k) \cup \delta_i(\eta(y) \cdot z_k))_{j_i=k} \cup \bigcup_{o \in \text{cts}(P)} (\gamma_i(\eta(y), o) \cup \delta_i(o))_{j_i=o}$ ,  $\psi$ , which is the body of a grounding of  $r_a$  in  $P_U$  with head  $a(\eta(y))$ . Then, by applying the reduct one obtains that  $\mathcal{M}(P_U^M) \models \beta^+(\eta(y)) \cup \bigcup_{1 \leq k \leq d} (\gamma_i^+(\eta(y), \eta(y) \cdot z_k) \cup \delta_i^+(\eta(y) \cdot z_k))_{j_i=k} \cup \bigcup_{o \in \text{cts}(P)} (\gamma_i^+(\eta(y), o) \cup \delta_i^+(o))_{j_i=o}$ , which is the body of a rule with head  $a(\eta(y))$  in  $P_U^M$ .

The other cases can be treated similarly.

Then, as  $a \in l(y) \cap \text{upr}(P)$  implies that there exists a node  $w \in T_r$  such that  $r(w) = (y, q_{t,a})$ ,  $\downarrow_f^t \in l(y)$  implies that there exists a node  $w \in T_r$  such that  $r(w) = (y, q_{t,x,f})$ , and  $\uparrow_f^o \in l(y)$  implies that there exists a node  $w \in T_r$  such that  $r(w) = (y, q_{t,o,f})$  (from transition rule (7)), it follows that  $M \subseteq \mathcal{M}(P_U^M)$ , and thus  $M$  is a minimal model of  $P_U^M$ .

□

**Theorem 5.2.** *Satisfiability checking of unary predicates with respect to FoLPs is EXPTIME-complete.*

*Proof Sketch.* That the task is EXPTIME-hard follows from the fact that satisfiability checking of unary concepts with respect to  $\mathcal{SHOQ}$  ontologies is EXPTIME-complete [Schild, 1991]; the latter has been reduced to satisfiability checking of unary predicates with respect to FoLPs [Feier and Heymans, 2013].

For the upper bound, we observe that for a given  $P$  and  $p$ , there is an exponential number of automata  $A_{\rho,\theta}^{p,P}$  (as there are an exponential number of possible  $\theta$ ). Each such automaton can be constructed in exponential time, and emptiness checking for  $A_{\rho,\theta}^{p,P}$  can be performed again in exponential time. The latter follows from Theorem 4.1 and the fact that the branching factor and the number of states of  $A_{\rho,\theta}^{p,P}$  are polynomial in the size of  $P$ , while its index is constant (viz. 2). Then, from Theorem 5.1 it follows that satisfiability checking of unary predicates with respect to FoLPs is in EXPTIME. □

## 6 Discussion and Conclusion

We have described a reduction of the satisfiability checking task of unary predicates w.r.t. FoLPs to emptiness checking of FEAs. This enabled us to establish a tight complexity bound on this reasoning task for FoLPs. Other reasoning tasks like consistency checking of FoLPs and skeptical and brave entailment of ground atoms can be polynomially reduced to satisfiability checking of unary predicates [Heymans, 2006]; thus, the complexity result applies to those tasks as well. Also, by virtue of the translation from fKBs to FoLPs, the result applies to fKBs as well: satisfiability checking of unary predicates w.r.t. fKBs is EXPTIME-complete. Thus, reasoning with FoLP rules and  $\mathcal{SHOQ}$  ontologies is not harder than reasoning with  $\mathcal{SHOQ}$  ontologies themselves.

In the introduction, we mentioned the special form of forest model property as one of the reasons FoLPs cannot be dealt with using 2ATAs. An additional technical difficulty we had to overcome compared to both encodings using 2ATAs and other encodings using FEAs, is the fact that FEAs, unlike 2ATAs,

cannot explicitly address successor nodes in runs: they are suitable for encoding graded modalities/number restrictions where the same property has to hold/not to hold at a given number of successors. In our encoding, in order to assert that different properties hold at different successors (as the structure of FoLP rules allows), we had to devise an addressing mechanism for successors. Furthermore, as terms occurring in any position in FoLP rules might be constants, our encoding also made use of a unification mechanism.

Finally, as our result shows that FoLPs have the same complexity as CoLPs, we plan to further investigate the extension of the deterministic AND/OR tableau algorithm for CoLPs [Feier, 2014] to FoLPs. As explained in [Feier, 2014], such an extension is far from trivial.

## References

- P. A. Bonatti, C. Lutz, A. Murano, and M. Y. Vardi. The complexity of enriched  $\mu$ -calculi. *Logical Methods in Computer Science*, 4(3):1–27, 2008.
- A. Cali, G. Gottlob, and T. Lukasiewicz. Datalog $\pm$ : A unified approach to ontologies and integrity constraints. In *ICDT*, volume 9, pages 14–30, 2009.
- D. Calvanese, G. D. Giacomo, and M. Lenzerini. 2ATAs make DLs easy. In *Proc. DL*, pages 107–118, 2002.
- D. Calvanese, T. Eiter, and M. Ortiz. Answering regular path queries in expressive description logics: An automata-theoretic approach. In *Proc. AAAI*, pages 391–396, 2007.
- D. Calvanese, T. Eiter, and M. Ortiz. Regular path queries in expressive description logics with nominals. *Proc. IJCAI*, pages 714–720, July 2009.
- T. Eiter and M. Šimkus. Bidirectional answer set programs with function symbols. In *Proc. IJCAI*, pages 765–771, 2009.
- T. Eiter, G. Ianni, T. Lukasiewicz, R. Schindlauer, and H. Tompits. Combining answer set programming with description logics for the semantic web. *AI*, 172(12-13), 2008.
- F. Fages. A new fix point semantics for generalized logic programs compared with the well-founded and the stable model semantics. *New Generation Computing*, 9(4), 1991.
- C. Feier. Worst-case optimal reasoning with Forest Logic Programs. In *Proc. KR 2012*, pages 208–212, 2012.
- C. Feier. *Reasoning with Forest Logic Programs*. PhD thesis, TU Wien, 2014.
- C. Feier and S. Heymans. Hybrid reasoning with Forest Logic Programs. In *Proc. ESWC*, volume 5554, pages 338–352. Springer, 2009.
- C. Feier and S. Heymans. Reasoning with Forest Logic Programs and f-hybrid knowledge bases. *TPLP*, 3(13):395–463, 2013.
- M. Gelfond and V. Lifschitz. The stable model semantics for logic programming. In *Proc. of ICLP’88*, pages 1070–1080, 1988.
- S. Heymans. *Decidable Open Answer Set Programming*. PhD thesis, Theoretical Computer Science Lab (TINF), Department of Computer Science, Vrije Universiteit Brussel, 2006. URL [http://stijnheyman.net/pubs/doasp\\_phd.pdf](http://stijnheyman.net/pubs/doasp_phd.pdf).

- S. Heymans, D. Van Nieuwenborgh, and D. Vermeir. Conceptual Logic Programs. *AMAI (Special Issue on Answer Set Programming)*, 47(1–2):103–137, 2006.
- S. Heymans, D. Van Nieuwenborgh, and D. Vermeir. Open Answer Set Programming for the Semantic Web. *Journal of Applied Logic*, 5(1):144–169, 2007.
- S. Heymans, D. Van Nieuwenborgh, and D. Vermeir. Open Answer Set Programming with guarded programs. *Transactions on Computational Logic*, 9(4):1–53, August 2008.
- M. Krötzsch, S. Rudolph, and P. Hitzler. Description logic rules. In *Proc. ECAI*, pages 80–84. IOS Press, 2008.
- D. Magka, M. Krötzsch, and I. Horrocks. Computing stable models for nonmonotonic existential rules. In *IJCAI*, 2013.
- B. Motik and R. Rosati. Reconciling description logics and rules. *Journal of the ACM*, 57(5):30:1–30:62, 2010.
- B. Motik, U. Sattler, and R. Studer. Query answering for OWL-DL with rules. *Journal of Web Semantics*, 3(1):41–60, July 2005.
- R. Rosati. DL+log: Tight integration of description logics and disjunctive Datalog. In *Proc. KR*, pages 68–78, 2006.
- R. Rosati. On combining description logic ontologies and nonrecursive datalog rules. In *Proc. RR*, pages 13–27, 2008.
- K. Schild. A correspondence theory for terminological logics: Preliminary report. In *IJCAI*, pages 466–471, 1991.
- M. Y. Vardi. Reasoning about the past with two-way automata. In *Proc. ICALP*, pages 628–641. Springer, 1998.